

☒ Rue de Moorsledestraat 100  
1020 Bruxelles Brussel  
BE - Belgique - Belgïe



☎ : +32(0)2 427 43 63  
☎ : +32(0)2 425 29 49  
✉ : ilvriss@skynet.be

WO129-07

## ARCHITECTURAL



### LW320-130-WP-PC-240V

LED WALL WASHER (I) - outdoor-size: L320\*W145\*H225, 240V/12V, with 36pcs of high power led (12 red, 12 blue, 12 green) with 1,5m power cable, with AC96-264V/12V 2,5µA switching power supply.



### LW-240-PC-W

LED WALL WASHER (II) - one row, for outdoor use (IP65), 240V, 12pcs 1W high power white leds, max power consumption: 30W, weight: 1,5kg



### LW-PAR-DIA220\*250-240V

LED SPOT LIGHT, 360 leds (120 red 120 green 120 blue), Beam angle: 25 degree, input voltage: AC100V-240V, Operating Voltage: DC12V, max current: 2A, max Wattage: 24W, operating temperature: -20°C +60°C, luminous intensity: 200LM, colour range: red, green, tube: transparent PC, material of lamp, holder: black ABS (fireproof), size: L240xW214xH33 1mm, net weight: 1,7kg



### A0033

245 PROJECTING LAMP  
240 V - 50 W



### 60013

96 SPOT LIGHT - LED  
240 V - 20 W




LI002 - ICE CUBE (indoor)  
6V, L:132xW132 x H:150mm, power consumption: 3,15W, colour changing with 48 leds (red, green, blue) with matte metal base



### WR-0001-LD-05

LED BASE LAMP SERIE - 9 leds mini square base light with round holes, colour: white, operating current: 15mA, size: 75x75x50MM. Light source: 3x1W led, colour: white, lighting fixture: die casting aluminium, glass: frosted glass, electrical wire: 2468 24AWGX2C 5M with DC plug, operating current: 350mA, with high power, transformer and junction box to control 8 leds)



### WR-0005-LD-04

12 leds high power mini rectangular base lamp, light source: 3x1W led, colour: white, lighting fixture: die casting aluminium, glass: frosted glass, electrical wire: 2468 24AWGX2C 5M with DC plug, operating current: 350mA low power, with transformer and junction box to control 3 leds



### WR-0006-LD-04

13 leds mini rectangular base lamp (high power), light source: 3x1W led, colour: white, lighting fixture: die casting aluminium, glass: frosted glass, electrical wire: 2468 24AWGX2C 5M with DC plug, operating current: 350mA low power, with transformer and junction box to control 3 leds

☒ Rue de Moorsledestraat 100  
1020 Bruxelles Brussel  
BE - Belgique - Belgïe



☎ : +32(0)2 427 43 63  
☎ : +32(0)2 425 29 49  
✉ : ilvriss@skynet.be

WO129-07

## ARCHITECTURAL



### **SRC-174L**

Src-174l, Dmx Professional Disco Controller, For Led Wall Washer Use (Lw-800-Revo-Pc-240v); One Piece Could Connect 64 Pcs Led Wall Washer

### **LW-400-REVO-PC-240V**


High Power Wall Washer, One Row, Revolving Type, For Outdoor Use(ip65), 12pcs 1 Watt Leds: 4red, 4green, 4blue; Operating Current: 1.8a, Power Consumption: 21.6w, Size: L400\*W122\*H52mm, Weight: 1.25kg, With A Built-In 100-240v/Dc 12v 2.5a Switching Power

### **LW-800-REVO-PC-240V**

High power wall washer, one row, revolving type, for outdoor use(ip65), 24pcs 1 watt leds: 8red, 8green, 8blue; operating current: 3.6a, power consumption: 43.2w, size: l800\*w122\*h52mm, weight: 2.2kg, with a built-in 100-240v/dc 12v 2.5a switching power

### **LW-1200-REVO-PC-240V**

High power wall washer, one row, revolving type, for outdoor use(ip65), 36pcs 1 watt leds: 12red, 12green, 12blue; operating current: 5.4a, power consumption: 64.8w, size: l1200\*w122\*h52mm, weight: 2.2kg, with a built-in 100-240v/dc 12v 2.5a switching power

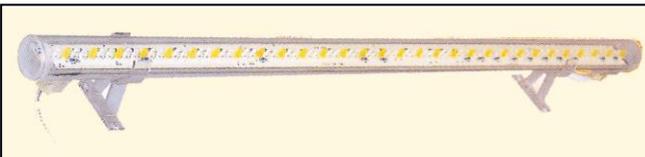

### **LN-MN-600-240V-CTC**

Mini led tube series, 240V, with 30 yellow bulbs and 60 white bulbs, size: L660\*W30\*H46mm, with 2\*10.mm<sup>2</sup> end cap + cable, with N002 plug, without controller


### **LN-MN-1000-240V-CTC**

Mini led tube series, 240V, with 45 yellow bulbs and 90 white bulbs, size: L1000\*W30\*H46mm, with 2\*10.mm<sup>2</sup> end cap + cable, with N002 plug, without controller



### **SRC-181-CTC-240V**

Controller for the LN-MN-...-CTC, can max load 2000 pcs LN-MN-600/1000-240V-CTC

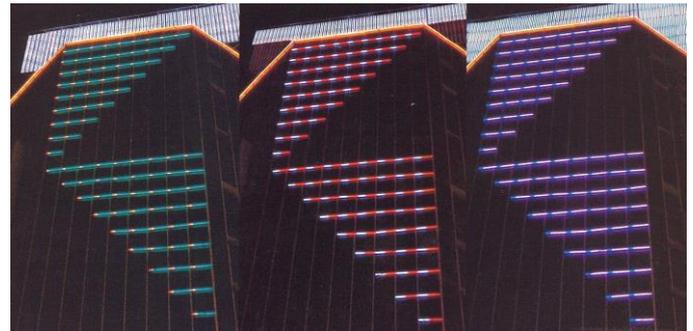

### **LN-MC-DIA50-12V-A (SDL-109L-Æ 50/LDT-N50-RDL-12VDC)**

MULTICOLOR CHANGING (new version)12VDC, 1,4A, with 144pcs LED (R48,G48,B48), milky white polycarbonate (anti-UV) tube, aluminium alloy (with surface oxidized) channel, size: L1000\*W50\*H75mm, weight: 1,0KG, with male and female connectors, with 2pcs mounting clip

### **SDL-109C-V6,0 (SDL-109C/LDT-CL)**

240VAC/12VDC, DMX 6,0A version controller for LN-MC-DIA50-12V LEDNEON TUBE USE, including power supplier, one SDL-109C can load 8pcs tubes

### **SDL-109P (SDL-109LP)**

240V, RELAY POWER SOURCE FOR LN-MC-DIA50-12V use, every 8 pcs tube need to connect 1pc SDL-109P power supply



### **LN-SC-DIA50-220V-1000-144-W**

### **LN-SC-DIA50-220V-1000-96-W**

LED NEON TUBE - 220V - 144 leds (or 96) - protection rating: IP65, power: 8,8W, net weight: 0,60kg, size: L1000\*W83\*H73mm, with male and female connectors, with 2pcs mounting clip

